





SIEVERT® Handyjet 2282, 2283 Jet 2281

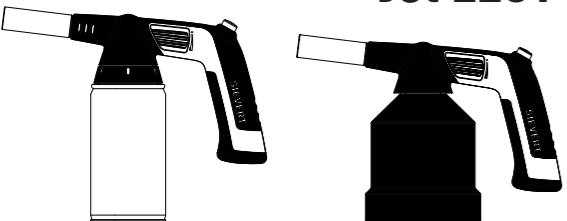

Handyjet 2282

Handyjet 2283



Jet 2281


INSTRUCTIONS
BRUKSANVISNING
BRUKSANVISNING
KÄYTTÖOHJEET
GEBRUIKSAANWIJZING
MODE D'EMPLOI
BEDIENUNGSANLEITUNG
BETJENINGSVEJLEDNING

GB**SE****NO****FIN****NL****FR****DE****DK**

Sievert AB
Box 1366
171 26 SOLNA
SWEDEN
email: info@sievert.se
www.sievert.se



Sievert Eesti AS is an ISO 9001
certified company.

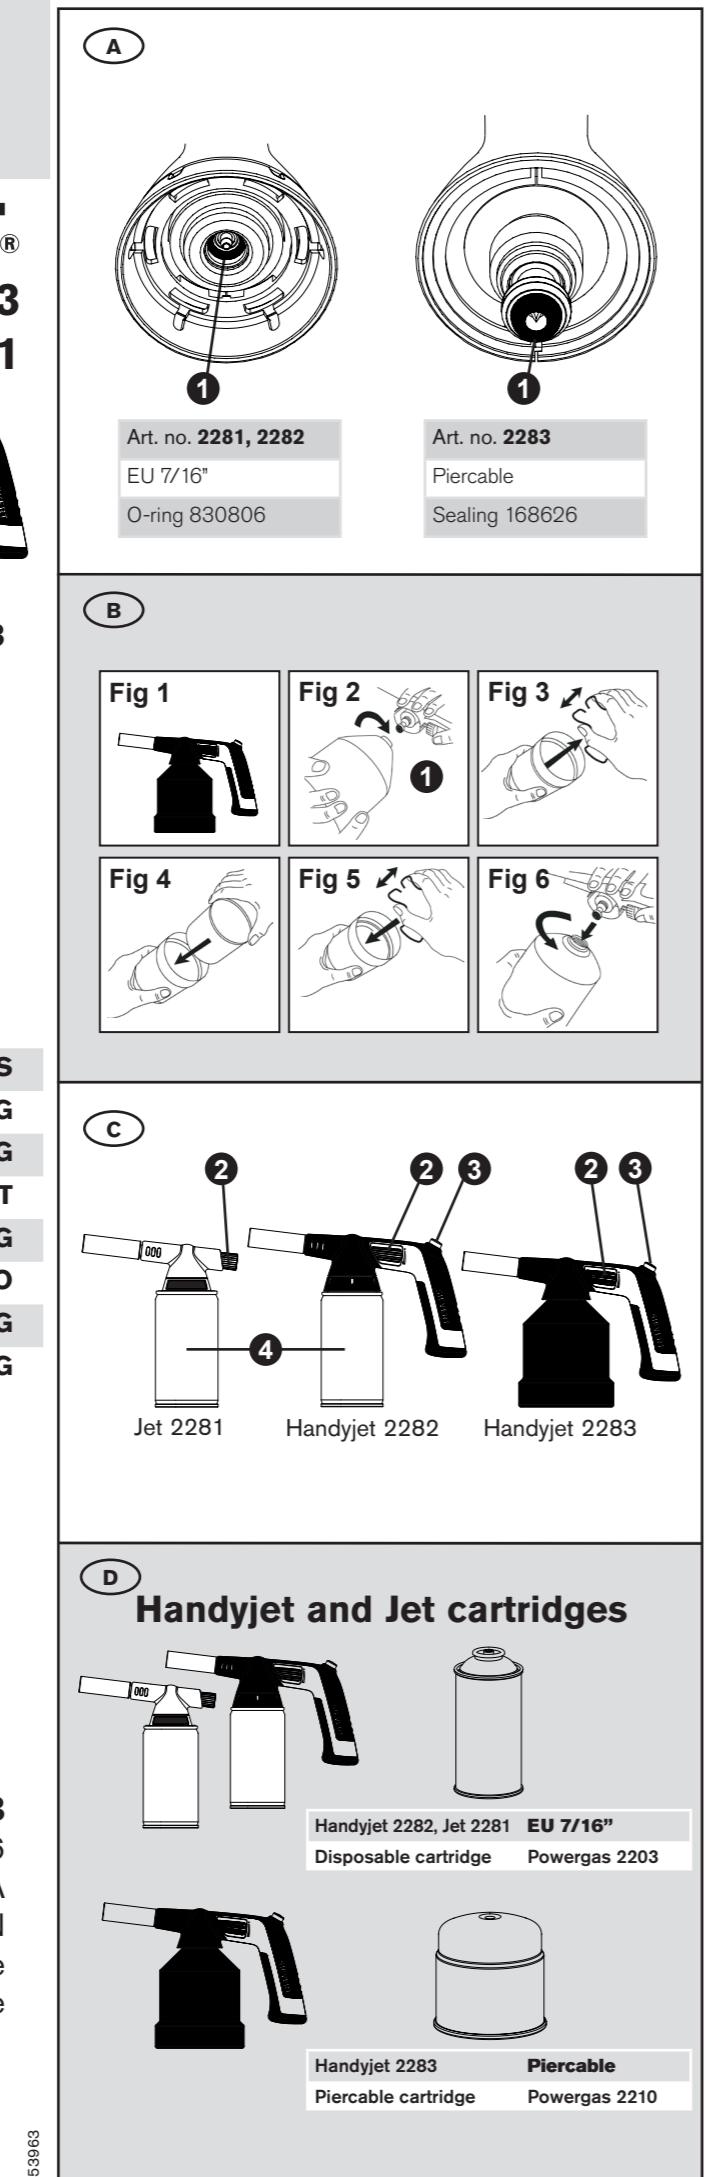SIEVERT®Swedish design and quality
since 1882.

53963

INSTRUCTIONS FOR USE
SIEVERT HANDYJET/JET BLOWTORCH

IMPORTANT: Read these instructions carefully and familiarize yourself with the product before fitting the appliance to the gas cartridge. Review the instructions periodically to maintain awareness. Retain these instructions for future reference. This appliance shall be used exclusively with Sievert gas cartridges. It may be hazardous to attempt to fit other types of gas cartridges.

1. SAFETY INFORMATION (Fig. A)

- 1.1 Ensure that the sealing washer (1 in fig A) are in place and in good condition before fitting the gas cartridge.
- 1.2 Never use an appliance with damaged or worn seals and never use a leaking, damaged or malfunctioning appliance.
- 1.3 Always change or fit the gas cartridge in a safe place, only outside, away from any source of ignition such as naked flames, pilot lights, electric fires and away from other people.
- 1.4 If you have to check the gas soundness of the appliance, do this outdoors. Do not check for leaks with a naked flame. Use soapy water only.
- 1.5 If there has been a leakage you have to be extra careful and ventilate the area thoroughly. Note that LP Gas is heavier than air. Therefore it can easily accumulate in trenches or below ground level.
- 1.6 Never leave the appliance unattended when lit.
- 1.7 This appliance consumes oxygen and must only be used in well ventilated areas - min. 5 m³/h.
- 1.8 Use the appliance a safe distance from walls and other combustible material.

2. HANDLING THE APPLIANCE

- 2.1 Be careful not to touch hot parts of the appliance during or after use.
- 2.2 Storage: Always unscrew the gas cartridge from the appliance when not in use. Store them in a safe dry place away from heat and out of reach for children. Never store gas containers in basements or other places underground.
- 2.3 Do not misuse the appliance, or use it for anything for which it has not been designed.
- 2.4 Handle the appliance with care. Do not drop it.

3. ASSEMBLING THE APPLIANCE

- | | | |
|---|--|--|
| <p>Jet 2281, Handyjet 2282</p> <p>3.1 Ensure that the control knob (2) is turned off (turned fully clockwise) and the sealing washer is in place.</p> | <p>Handyjet 2283</p> <p>Before changing the gas cartridge make sure that the old gas cartridge is completely empty.</p> | <p>Handyjet 2283</p> <p>Innan byte av gasbehållare ska man förvissa sig om att den gamla gasbehållaren är helt tom.</p> |
| <p>3.2 Keep the gas cartridge (4) upright when fitting it to the appliance.</p> <p>3.3 Place the valve appliance squarely on top of the gas cartridge valve.</p> <p>3.4 Gently screw the gas cartridge into the valve. Be careful not to fit the gas cartridge cross threaded. NOTE! Screw hand tight only. Do not over tighten or you will damage the gas cartridge valve.</p> | <p>Ensure that the control knob (2 on fig. 1) is turned off (turned fully clockwise). Unscrew the torch from the protecting case (fig 2)</p> <p>Take out the locking spring from the protecting case by pressing the locking spring together (fig. 3)</p> <p>Place the gas cartridge into the protecting case (fig. 4). Press the locking spring together and lock the cartridge in position into the protecting case with the spring (fig. 5). Ensure that the sealing washer is in place then screw the connecting valve into the upper hole of the casing. NOTE! hand tight only. (fig. 6)</p> | <p>Se till att reglerratten (2) är helt stängd (genom att vrida maximalt medurs).</p> <p>Håll gasbehållaren (4) i upprätt läge när den skall anslutas till gasapparaten.</p> <p>Placera gasapparaten ventil rakt på gasbehållaren (se Fig. C).</p> <p>Skriva fast gasbehållaren i skyddshuvens underdel (fig. 4). Kläm ihop läsfjäder och sätt in den i skyddshuvun under gasbehållaren så att den läses i läge (fig. 5). Skruva i ventilen i bläslampans anslutningshål och dra åt med normal handkraft. (fig. 6).</p> |
| <p>3.5 Ensure that a complete gas seal has been made. If you have to check the gas soundness of the appliance, do this outdoors. Do not check for leaks with a naked flame. Use warm soapy water only, applied to the joints and connections of the appliance. Any leakage will show up as bubbles around the leakage area. If you are in doubt or if you can hear or smell gas, do not attempt to light the appliance.</p> | <p>OPERATING THE APPLIANCE (fig C)</p> <p>Point the burner away from body and flammable objects.</p> <p>For Jet 2281: Turn the regulating knob (2) counterclockwise to open the valve and ignite the flame with a match or an ignitor at the burner end. For Handyjet 2282 and 2283: Turn the regulating knob (2) counterclockwise to open the valve and press the piezo knob to ignite the torch (3).</p> <p>Adjust flame size by turning the control knob (2).</p> <p>Use of Sievert Handyjet/Jet upside down. Handyjet/Jet are designed with a preheating tube, that heats up the gas before combustion in the burner. This helps reduce flare-ups when used upside down.</p> <p>After use, ensure that the valve is fully shut (regulating knob turned fully clockwise) and unscrew Jet 2281 and Handyjet 2282 from the gas cartridge. Do not unscrew Handyjet 2283 from its gas cartridge.</p> | <p>Se till att fullständig tätningsförmåga är uppnått. Kontroll av gas före start. Om det inte är fallet kan det förekomma rök och svart rök från brennaren. Använd tändsticka eller tennare för att tända brennaren.</p> <p>Rikta brennaren från kroppen och från brännbara föremål.</p> <p>För Jet 2281: Vrid reglerratten (2) mot klockan för att öppna ventilen och tändgasläggen med tändstickskalet eller lättadare vid brennarens mynnning. För Handyjet 2282 och 2283: Vrid reglerratten (2) moturs för att öppna ventilen och tänd med piezo (3).</p> <p>Önskad lågsäfjärden ställs in med ratten (2).</p> <p>Användning av Handyjet/Jet upp och ned. Handyjet/Jet är konstruerad med ett förvarningsrör som värmer gasen. Detta gör att användning upp och ned kan göras utan uppfärmning.</p> <p>Efter användning ska reglerratten stängas och Handyjet/Jet skruvas bort från gasbehållaren (gäller inte 2283).</p> |
| <p>4. OPERATING THE APPLIANCE (fig C)</p> <p>Point the burner away from body and flammable objects.</p> <p>For Jet 2281: Turn the regulating knob (2) counterclockwise to open the valve and ignite the flame with a match or an ignitor at the burner end. For Handyjet 2282 and 2283: Turn the regulating knob (2) counterclockwise to open the valve and press the piezo knob to ignite the torch (3).</p> <p>Adjust flame size by turning the control knob (2).</p> <p>Use of Sievert Handyjet/Jet upside down. Handyjet/Jet are designed with a preheating tube, that heats up the gas before combustion in the burner. This helps reduce flare-ups when used upside down.</p> <p>After use, ensure that the valve is fully shut (regulating knob turned fully clockwise) and unscrew Jet 2281 and Handyjet 2282 from the gas cartridge. Do not unscrew Handyjet 2283 from its gas cartridge.</p> | <p>5. CHANGING THE GAS CARTRIDGE</p> <p>Jet 2281, Handyjet 2282</p> <p>5.1 Shut the valve with the regulating knob (2). Be sure the flame is extinguished, the burner has cooled down and no other flame is nearby. Take the appliance outdoors away from other people. Unscrew the gas cartridge from the valve and replace the appliance sealings washer if it is cracked or worn. Avoid cross threading by putting the valve onto the gas cartridge screw thread squarely and screw on hand tight only, as described in section 3.</p> <p>Before changing the gas cartridge make sure that the old gas cartridge is completely empty. Change the gas cartridge outdoors away from other people and not in the vicinity of naked flames. Unscrew the valve from the protecting case. Press the locking spring and remove the empty cartridge. Put in a new cartridge by following assembly instructions in section 3.</p> | <p>Stäng ventilen med reglerratten (2) helt. Se till att lågan är släckt, att brännares kallnat och att ingen annan eld finns i näheten. Gasbehållaren ska bytas utomhus där inga människor befinner sig. Skruva av behållaren från ventilen och byt ut tätningar om de är spruckna eller uttröttade. Undvik snedgångning genom att placera gasapparaten ventil rakt på gasbehållarens gänga och skruva i den endast med handkraft, såsom beskrivs under punkt 3.</p> |

D Handyjet and Jet cartridges

